

Raspberry Pi RP2040

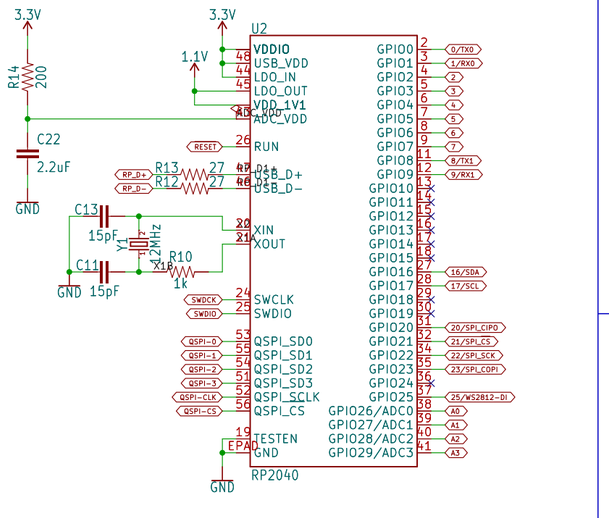


Disable flash boot
(forces USB boot)


16MB Flash

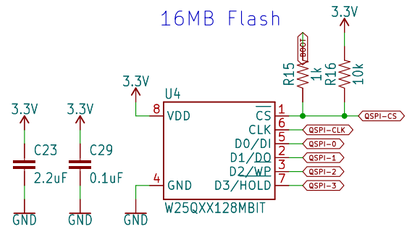


Power Select and Regulation

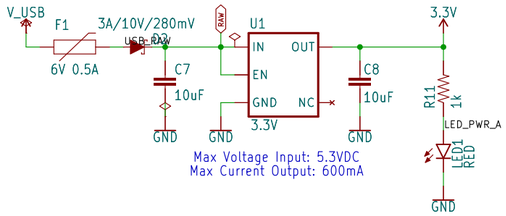


USB




Status LED

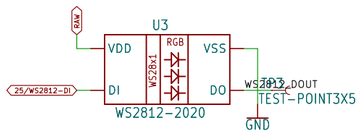


Boot / Reset Buttons



Connections



Max Voltage on RAW: 5.3V
V-Reg can handle up to 6V
but WS2812 max is 5.3V



Released under the Creative Commons
Attribution Share-Alike 4.0 License
https://creativecommons.org/licenses/by-sa/4.0/

Special Instructions

TITLE:

Design by:

REV: v11

Sheet: /

File: eda-crossover.kicad_sch

Sheet:

Date:

Title:

Size: User

Date:

Rev:

KiCad E.D.A. 10.0.6

Id: 1/1